

3800

UNSURPASSED SAFETY AND SECURITY

At Chamberlain, safety is a major part of our mission. It's our commitment to you and, quite simply, the way we produce products every day. Our LiftMaster® products are designed to move the largest door in your home, safely, securely and by always putting safety first.

All LiftMaster® garage door openers are manufactured with the highest level of safety and monitoring systems to ensure safe operation.

The Protector System® safety sensors reverse the door automatically if the infrared beam is broken, before contact is made.

Power door lock for extra security; when the door is down it is securely locked.

Sensing technology will stop the door from closing if contact is made with a person or object.

Security+® Rolling Code Technology assures a new code is sent every time the remote is used.

Opener light turns on automatically when The Protector System® safety infrared beam is broken.

The Alternate Power System eliminates the risk of having to do any dangerous rewiring or the high cost of hiring an electrician.

EXCLUSIVE DESIGN FOR UNIQUE GARAGE APPLICATIONS



Engineered for Style
Provides an attractive appearance along with ultra-quiet performance.



Provides More Room for Storage
Frees up valuable overhead storage space.



Ideal for Unique Installations
A great option for garages with limited height, cathedral or obstructed ceilings.



Remote Light
Works just like a traditional garage door opener light, but it can be positioned anywhere on the garage ceiling within 6' of an outlet. Provides 200 watts of light with 1½ to 4½ minute timer.

Applications: The model 3800 can be installed on the following types of doors: standard sectional, highlift, follow the pitch track, low headroom (must have a minimum top track radius of 3.5")

ADDITIONAL ACCESSORIES



Garage Door Monitor
Know for sure the door is closed. Lets you know when your garage door is open or closed from any room in your home.
Model 915LM



Wireless Secondary Control Panel
More control that's easy! Specifically designed for people who want an extra control panel in their garage. It's wireless and can be installed almost anywhere you choose.
Model 378LM



Laser Garage Parking Assist
The high-tech solution that helps you maximize usable garage space. The laser guidance system projects a beam down exactly where to park and when to stop.
Model 975LM

SPECIFICATIONS

STANDARD SPECIFICATIONS

DIMENSIONS

Garage Door Opener Dimensions:
6.85"D x 16.25"H x 6.01"W
Maximum Door Size: Up to 14' High,
Total of 180 Square Feet
Maximum Door Weight: 650 Lbs.
Headroom Clearance Required: 3"
from Center of Torsion Bar

CARTONS

Number of Cartons: 1
Carton Dimensions and Contents:
24" x 10" x 12"
Smart Control Panel™
373P Premium 3-Button Remote Control
Garage Door Opener Head
Power Door Lock
Cable Tension Monitor
Remote Light
The Protector System®

SECURITY+® RADIO CONTROLS

Coding System: Smart Receiver
Code Button and Indicator Light
373P Premium 3-Button Remote Control
Operating Temperature: -30°F to 150°F
Frequency: 315MHz
Security+® Anti-Burglary Coding

CONVENIENCE/SAFETY

The Protector System®
Emergency/Quick Release
Ventilation/Pet Opening
Down Safety Reverse
Up Safety Stop
Door Open/Beam Obstructed/Lights On
Program Remote Controls from Smart Control Panel™
EverCharge® Standby Power System
Compatible Model 475LM (optional accessory)

ELECTRICAL SPECIFICATIONS

POWER

Powerhead Voltage: 120V AC, 60Hz; Wattage: 120;
Current Rating: 1.0A; CUL/UL Listings: Yes; Length of Line
Cord: 6' (3-prong); Worklight Voltage: 120V AC, 60Hz;
Wattage: 200; Current Rating: 1.7A; CUL/UL Listings: Yes;
Length of Line Cord: 6' (2-prong)

LOGIC TYPE

Solid-State Microcontroller with Built-in Surge Suppressor

LIGHTING

Number of Bulbs: 2
Maximum Wattage: 100 x 2
Adjustable Time, Solid-State Delay

MECHANICAL SPECIFICATIONS

MOTOR

Heavy-Duty 24V DC Motor
180 Newtons in Up Direction
120 Newtons in Down Direction
Thermal Protection: Automatic
Lubrication: Permanent

DRIVE MECHANISM

Drive Means: Internal Chain and Sprocket
Reduction Means: Gear 63:1

ADJUSTMENTS

Force: Electronic/Internal Auto Force
Limit: Internal/Electronic

TRAVEL RATE

Approximately 7.6" per Second

SHIPPING WEIGHT

Entire System: 31 Lbs.

MATERIALS

Chassis: Steel
Plastic Cover

LIFETIME MOTOR WARRANTY

5 years on all other parts. For more information, refer to owner's manual. LiftMaster® garage door openers meet all current state and federal regulations and CUL/UL safety regulations as of date of manufacture. 1-year warranty on optional battery.



The in-vehicle universal remote control. See your automobile dealer for availability.

ELITE SERIES™

3800

Residential Jackshaft Garage Door Opener



Residential Jackshaft Garage Door Opener – 3800 Ultra-quiet, space-saving, wall-mounted design

Today's garages go far beyond a place to merely park your vehicle. They have evolved into a place for working on projects, fixing the car or kicking back with friends. For this type of space and for this type of homeowner, we offer the Model 3800.

This specially designed garage door opener is mounted to the wall beside the garage door. It frees up ceiling space that can now be used for maximum storage. The powerful DC motor provides ultra-quiet operation, along with smooth start and smooth stop to reduce the noise of the garage door as it opens and closes. What's more, this unique system offers the added option of a standby power system to let you get in and out of your garage, even when the power is out.

The 3800 Difference...

- Specially designed for garages and unique applications that don't allow for a traditional garage door opener, such as garages with very low, cathedral or obstructed ceilings
- Ultra-quiet 24V DC motor performance
- Optional EverCharge® standby power system reliably opens door even when the power goes out
- For sectional doors only, up to 14 feet high or 180 square feet, 650 pounds
- Meets all UL325 requirements

OPTIONAL FEATURES



Alternate Power System

Put power right where you need it with our Alternate Power System. Added flexibility makes installing easier, bringing electricity to the opener, so there's no need for an electrician. UL approved.



EverCharge® Standby Power System

After the power goes out, the standby power system will operate the garage door opener for 20 full cycles within a 24-hour period.

CHAMBERLAIN®
LiftMaster®
ELITE SERIES™



Service • Repair • Sales • Installation
(707) 795-DOOR (3667)
Rohnert Park, CA 94928

World's #1 Installed Garage Door Opener
THE CHAMBERLAIN GROUP, INC.
845 Larch Avenue • Elmhurst, IL 60126
www.liftmaster.com




©2008 LM 3800 04/08
The Chamberlain Group, Inc.
Printed in U.S.A.

WARNING: Garage doors and openers can be dangerous if not properly installed, tested and operated. Children should be supervised by an adult whenever in or around the garage area.

LMCA3800

CHAMBERLAIN®
LiftMaster®
ELITE SERIES™

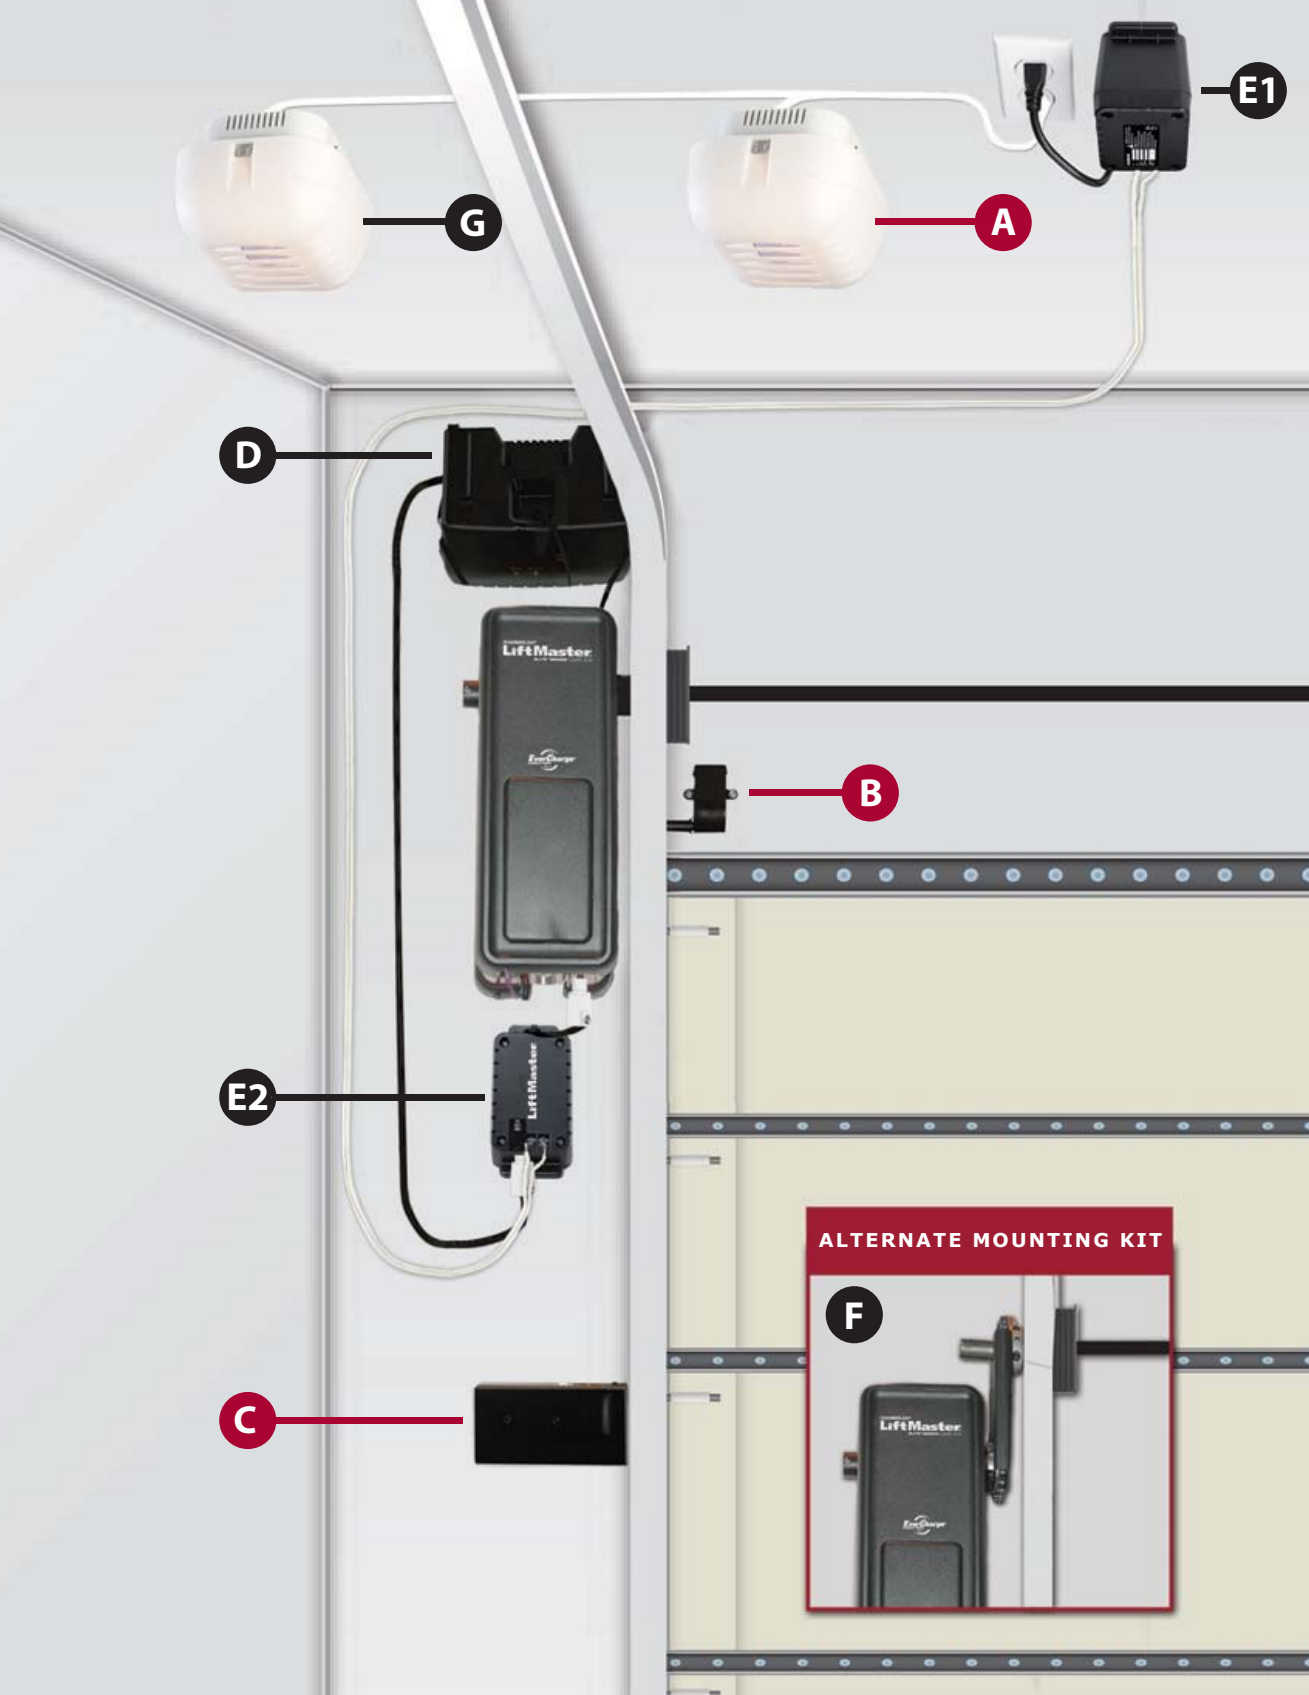

INCLUDED

- A Remote Light**
Garage door opener light that can be positioned anywhere on the ceiling within 6' of an outlet.
- B Cable Tension Monitor**
Specifically designed to maintain accurate tension and eliminate "cable throw," which occurs when the cable slips off the drum.
- C Power Lock**
Similar to a deadbolt, it ensures the door cannot be forced open.



Multi-Function Smart Control Panel™
Provides time, temperature and diagnostic information about your opener.



Premium Remote Control
Illuminates with bright, blue lights as your hand approaches

OPTIONAL ACCESSORIES

- D EverCharge® Standby Power System**
After the power goes out, the standby power system will operate the garage door opener for 20 full cycles within a 24-hour period.* Remote light remains off and audible signal will sound to alert the homeowner that power is out and battery backup is in use.
*Fully charged batteries at 72°F.
Model 475LM

- F Alternate Mounting Kit**
Obstructed areas and low ceilings are no longer a problem. Our Alternate Mounting Kit allows you to lower the RJO and still reap the benefits of the compact jackshaft design. Installs quickly and easily.
Model 480LM

- E Alternate Power System**
Put power right where you need it with our Alternate Power System. Added flexibility makes installing easier when an outlet is not available within 6' of the installation, so there's no need for an electrician. UL approved. Includes transformer box (E1), interface box (E2), 35' of low-voltage wire and all required mounting hardware.
Model 580LM

- G Additional Remote Lights**
Add as many lights as you wish. All lights can be turned on and off by opener activation or control panel light button.
Model 380LM



Fingerprint Keyless Entry
No passcodes or PIN numbers to remember. Capability to read up to 10 unique fingerprints, and accepts only those fingerprints you program into it. Features Security+® with rolling code technology.
Model 379LM-10

ALTERNATE MOUNTING KIT



INSTALLATION FEATURES

- Wall-Mount Installation**
Mounts on left or right side of door. No rails to hang, it simply mounts on the wall and attaches to the garage door torsion bar. Unit requires an electrical outlet within 6' or the optional Alternate Power System accessory.
- Patented Absolute Positioning Technology**
The newest technology in garage door openers, our patented design allows the electronic limits to be extremely accurate, even after a power failure.
- Exclusive! The Smart Garage Door Opener®**
Lets you electronically program additional remotes or a keyless entry from the Smart Control Panel™ or the powerhead.

Quick-Connect™ Terminals
Push-in wiring for quicker installation.

6-Foot Power Cord
Makes connecting to a power source easier than ever.

Push Button Limit Settings/ Automatic Force Sensing
Allows for faster setup. Auto-force feature constantly monitors garage door system and adjusts forces to temperature fluctuations, floor height and door track movement.