

MODEL 8600

(Formerly Model 6600)



DOOR FEATURES

Section Joints -


Snug fitting tongue-and-groove section joints reduces wind and weather from entering the garage.

Durable DecaTrim[™] II Overlays

These overlay boards are specially treated to resist termites, weather and fungal decay.

Foamed-In-Place — **Polyurethane Insulation**

Provides thermal efficiency with a U-factor* **₹** of 0.15 and an R-value** of 12.12, helps block street nose and makes the



- *U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes.
- **Wayne Dalton uses a calculated door section R-value for our insulated doors.

High Cycle Spring Option

Choose a 25,000 cycle spring for more than twice the life of a standard torsion spring.

Heavy Duty Hinges

Attractive 14-gauge heavy duty hinges provide maximum strength between sections, stability and smoother door operation.

Quiet Rollers

Ball-bearing rollers with nylon wheels and solid steel shafts provide years of smooth, quiet and dependable service.

Wind Load Options





Available with hardware and reinforcements to comply with building codes in regions with high winds.

Limited Lifetime Warranty




Choose Your Style

All door top sections are available in arched or square designs.


Double car door designs are equivalent to 2 single-car doors side by side.

Square Top

Somerset

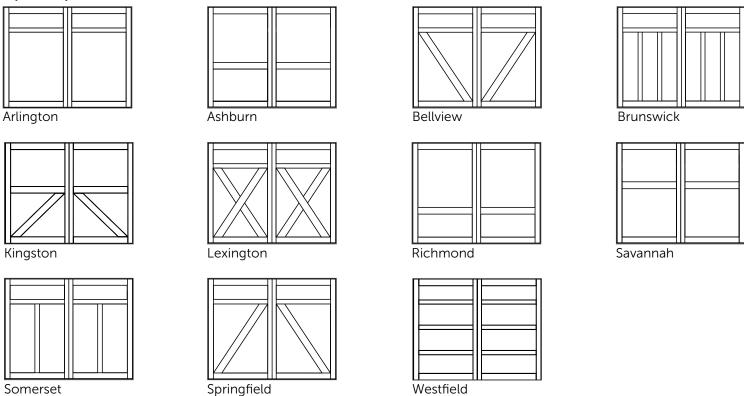

Springfield

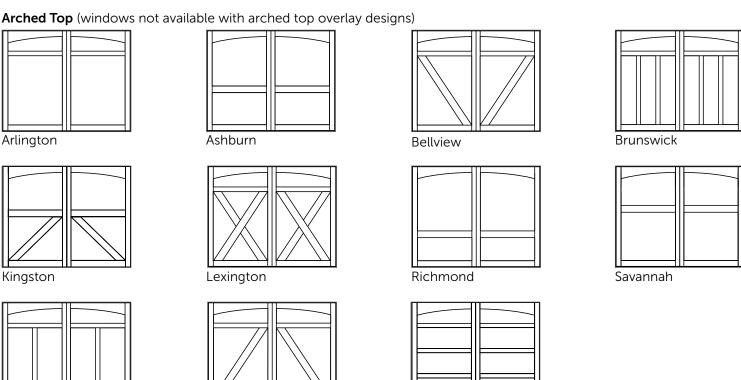


Westfield

Choose Your Overlay Texture

DecaTrim™ II Overlay Texture Options





Smooth

Choose Your Color

Actual colors may vary from brochure due to fluctuations in the printing process. Always request a color sample from your dealer for accurate color matching before ordering your door.

DecaTrim™ II overlays are provided in White only. For a two-toned look, choose from, Almond, Sandstone, Terra Bronze, Brown or Black as shown below.













White/White

Almond/White

Sandstone/White

Terra Bronze/White Brown/White

Black/White


Choose Your Windows


Window patterns are shown for an 8' wide single-car door. Spacing of windows may change depending on door size. Not all windows are available in all door sizes.

Routed windows

Doors built with the Routed windows use a clean top section design where the wood overlay is routed from a wood face panel.

Only available with smooth overlay trim.







Framed Insert windows

Doors with Framed Insert windows use a classic wood door design with the top section constructed from wood overlay boards.

Available for both smooth and wood grain overlays.







Somerton

Wyndbridge


Choose Your Decorative Hardware







Arrow See website for additional hardware options.

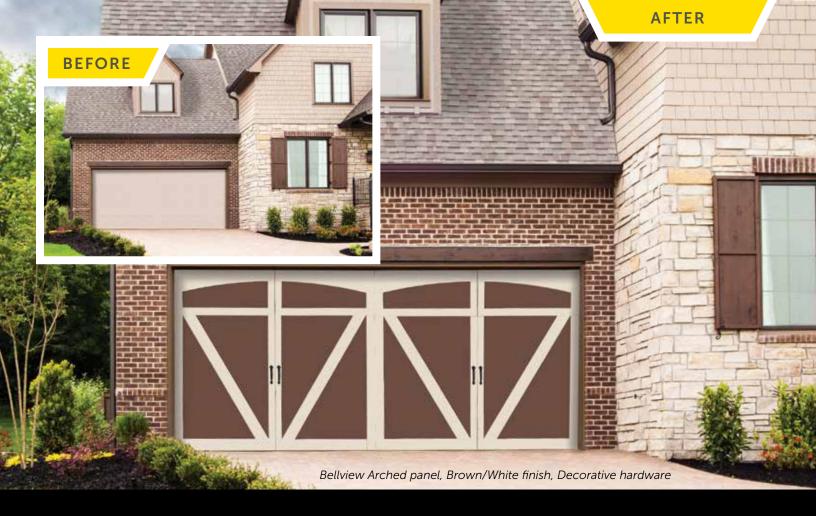



Garage Door Design Center

To see this door on your home, visit wayne-dalton.com, or download our Garage Door Design Center app. Upload a photo of your home and experiment with panel designs, color options, window styles and decorative hardware designs. Instant curb appeal awaits you with just a click of your mouse.

THERMAL PERFORMANCE



Wayne Dalton participates in the DASMA Thermal Performance Verification Program. The program verifies the thermal performance of sectional garage doors. The lower the U-factor rating, the better the thermal performance.



Symbol indicates verified U-factor rating in accordance with the DASMA Thermal Performance Verification Program.

Wayne Dalton.

DISTRIBUTED BY:

2501 S. State Hwy. 121 Bus., Ste 200 Lewisville, TX 75067

wayne-dalton.com















© 2024 Wayne Dalton, a Division of Overhead Door Corporation. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation. Item W900-1219 10/24